

INB-58F0002M0PA

SKU: 238642



Network Bullet Camera, 180° Panorama, 3840x2160, 2.0mm AI, WDR, PoE, 12V, IP67

Main Features

-
- 1/2.8" Sony STARVIS CMOS sensor,
-
- Maximum resolution 3840x2160 pixels, 20fps
-
- Panorama ultra wide-angle camera 180° HFoV
-
- AI analysis functions including object classification
-
- WDR and 3D-DNR noise reduction
-
- Lens 2.0mm fixed focal length
-

-
- Smart codec H.265/H.264, multi-streaming
-
- Browser-independent (Edge, Safari, Firefox, Chrome)
-
- Supports ONVIF profiles S/T/G and audio
-
- Local storage via micro SD card
-
- Power supply 12VDC or PoE IEEE 802.3af
-
- Integrated IR and white light LED illumination, IP67
-

Specifications

| General: | |
|-----------------------|---|
| Dimensions (HxWxD) | 95x241,3mm |
| Illumination | 2x High Power LEDs 850nm,2x Whitelight LED,Infrared,White light |
| Integrated wall mount | yes |
| SDK | upon request |
| Sunshield | yes |
| Text display | ON/OFF switchable |
| Series | eneo IN-Series |
| Camera Type | Multidirektional Kamera, People Count, Retail Intelligence |

INB-58F0002M0PA

Continuation of the specifications

| | |
|-------------------------------|---|
| Housing | Outdoor |
| Color (housing) | Pantone P 179-1, RAL9003 |
| Housing material | Aluminium |
| Heater | no |
| Blower | no |
| Mounting | Ceiling mount, Wall mount |
| Supply voltage | 12VDC |
| Power consumption | 12W |
| Power over Ethernet | IEEE 802.3af |
| Vandal proof | no |
| Operating temperature | -35°C ~ +60°C, @ Humidity 90% or less (non-condensing) |
| ONVIF | ONVIF Profile G, ONVIF Profile S, ONVIF Profile T |
| Protection rating | IP67 |
| Illumination range | approx. 15m, approx. 25m, Infrared, White Light |
| Weight | 350g |
| DORI: | |
| Observe (62 px/m) | 28,2 m |
| Recognize (125 px/m) | 13 m |
| Identify (250 px/m) | 6 m |
| Detect (25px/m) | 71,2 m |
| Functions: | |
| Alarm processing | recording internal storage (SD card),E-Mail,HTTP,FTP,TCP,UDP,alarm out,Cloud Upload |
| Motion detector | yes |
| Digital noise reduction (DNR) | 3D-DNR,yes |
| Menu languages | English,German,French,Italian,Portugese,Spanish,Turkish,Russian,Japanese |
| Mirror function | V flip,H-flip,H/V flip |
| Multicast compliant | yes |
| Password protection | administrator & users |
| Privacy zone masking | Areas-ON/OFF switchable |
| Web browser | MS Internet Explorer 10/11,Safari ,Firefox ,Google Chrome ,Edge |
| Digital Noise Reduction | 3D-DNR, yes |
| Audio support | yes |
| Internal storage | 256GB, microSDHC card, microSDXC card |
| Analysis functions | Cross Counting (CC), Heat Map (HM), Human&Vehicle Detection (PD&VD), Line Crossing Detection (LCD), Perimeter Intrusion Detection (PID), Rare Sound Detection (RSD) |
| Audio | built-in loudspeaker, built-in microphone |
| Remote configuration | Browser |

INB-58F0002M0PA

Continuation of the specifications

| | |
|------------------------------------|--|
| Camera: | |
| Imager | Sensor IMX415,CMOS, CMOS |
| Automatic electronic shutter (ESC) | 1/5 ~ 1/20.000sec. |
| Backlight compensation | BLC,HLC |
| Low speed shutter | yes |
| Manual electronic shutter (MES) | 1/5 ~ 1/20.000sec. |
| Signal-to-noise ratio | 44dB |
| Day&Night mode | Day,Night,Time,night-color mode |
| White balance | Automatic,Manual |
| Wide Dynamic Range (WDR) | WDR, WDR |
| Resolution Standard | 8 Megapixel |
| System | True Day&Night |
| Sensor size | 1/2.8" |
| Day&Night switch | ICR |
| Sensitivity | 0,007 Lux bei F1,0 |
| Camera type | Bullet |
| Parts supplied: | |
| Parts supplied | manual,bag of screws |
| Network: | |
| Network protocols | TCP/IP,HTTP,DHCP,DNS,DDNS,RTP,RTSP,SMTP, NTP,UPnP,SNMP,HTTPS,FTP |
| Lens: | |
| Lens Type | fixed focal length |
| Focal Length | 2 mm |
| Iris Control | DC |
| Digital Zoom | yes |
| MOD (Minimum Object Distance) | 0,6 m |
| Interfaces / Inputs/ Outputs: | |
| External connectors | RJ-45,12VDC input (DC plug),micro SD card slot 256 GB |
| Video outputs | no |
| Alarm inputs | no |
| Alarm outputs | no |
| Ethernet interface | 100Base-TX, 10Base-T |
| Serial interfaces | Ethernet |
| Video: | |
| Resolution | 3840x2160 (16:9) @20fps,2592x1944 (4:3),2304x1296 (16:9),1920x1080 (16:9),1280x960 (4:3),1280x720 (16:9),640x480 (4:3) |
| Image display | 16:9,4:3,VerticalView |
| Stream types | Triple-Stream(Main/Sub/Mobile) |
| Video compression | H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG |

INB-58F0002M0PA

Continuation of the specifications


| | |
|---------------------------|--|
| Image resolution max. | 3640x2160 |
| Image Transmission Rate | 25 fps |
| Other | |
| Remarks | NDAA compliance under Section 889, The face detection and license plate recognition functions are only available with an inserted SD card or in conjunction with a recorder from the eneo IN series. |
| Low Speed Shutter | yes |
| Backlight Compensation | BLC, HLC |
| Motion Detector | yes |
| Horizontal Angle of View | 180° |
| Vertical Angle of View | 91° |
| Illumination | Infrared, White light |
| Manufacturer order number | 238642 |

Optional Accessory

| SKU | Name | Description |
|--------|--------------------------------|---|
| 233775 | AK-21 | Camera connection box for Wall and ceiling mounting, IN Series Bullet Cameras |
| 235339 | AK-24 | Dual camera connection box for Bullet or Fix Dome IN-Series cameras |
| 236198 | eneo INsight Installation Tool | Supports adjustments for cameras with AI features for IN-series |
| 234990 | eneo INsight mobile | Mobile App for recorder IN- and MN-series |
| 218218 | eneo Site Manager | Management Software for eneo IP products |

INB-58F0002M0PA

Technical Drawing

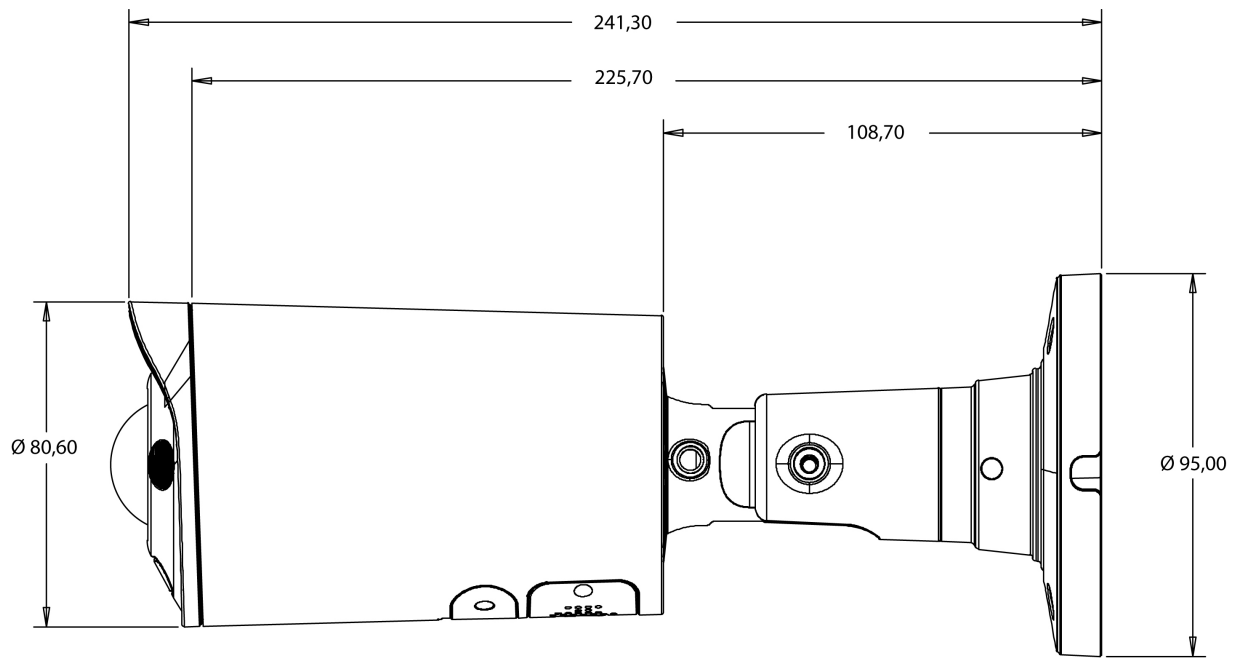

Maße / Dimensions: mm



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

